


HIGH PERFORMANCE BUTTERFLY VALVE HP 300

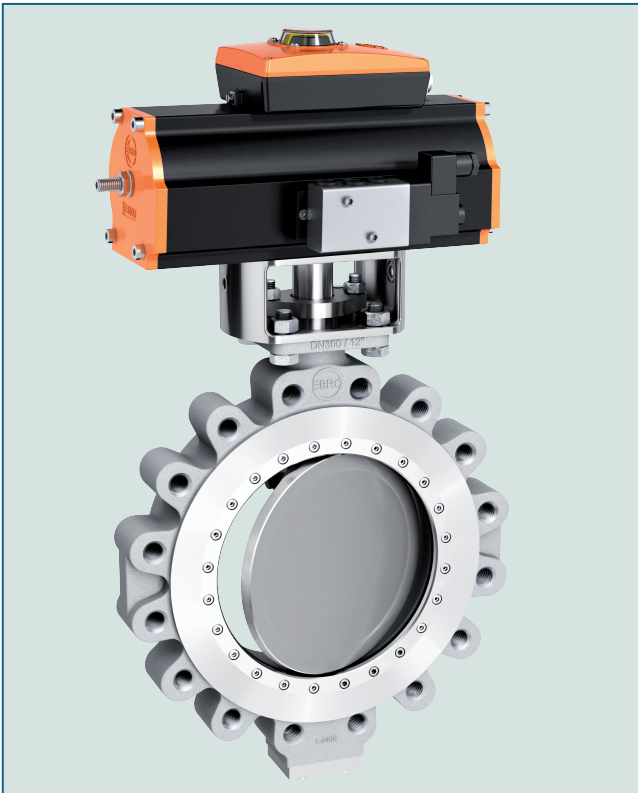

Lug type butterfly valve in triple-eccentric construction. Reliable sealing even with extreme temperature and pressure conditions up to 63 bar.

TECHNICAL DATA


Nominal diameter:	DN 80 - DN 600 (larger nominal diameter on request)
Face-to-face:	EN558 R25 \leq DN 250 EN558 R16 \geq DN 300 API 609 Class 300
Flange accommodation:	EN1092 PN40, PN63 ANSI B16.5 class 300, class 600
Tightness check:	EN12266 (Leakage rate A) API 598 FCI 70/2
Temperature range:	-60°C to +650°C
Differential pressure:	63 bar \leq DN 400 50 bar \geq DN 450

FEATURES

- Shut-off and control of gaseous and liquid media
- Control performance nearly linear
- Tricentric design
- Floating design of the seat ring
- Two versions of the seat ring available:
full-metall and stainless steel / Graphite lamella seat
- Robust design suitable for heavy duty applications and media with solids content
- Shaft gasket adjustable
- End of line service at full pressure
- Flange sealing surface of the clamping ring not interrupted by screw counter bores
- Fire safe BS 6755 Part 2, API 607 5th edition


GENERAL APPLICATIONS

- Heat power plants
- Refineries
- Paper industry
- Chemical and petrochemical industry
- Hot water and steam systems
- Geothermal energy

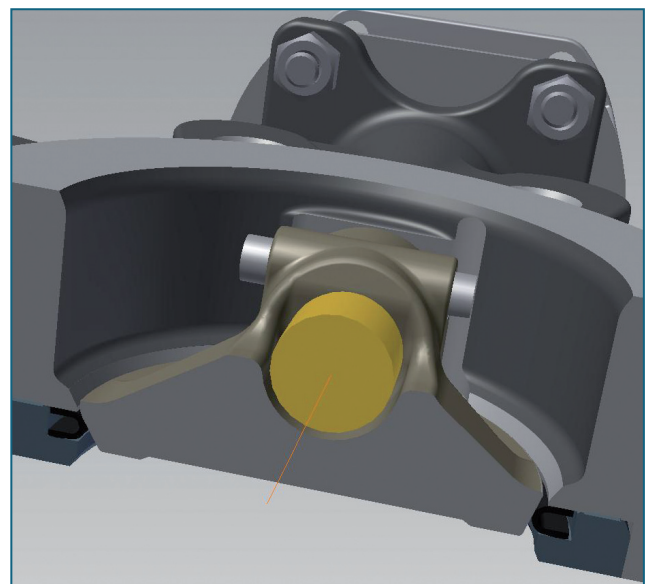

The sealing system of the HP 300.


HIGH PERFORMANCE BUTTERFLY VALVE HP 300

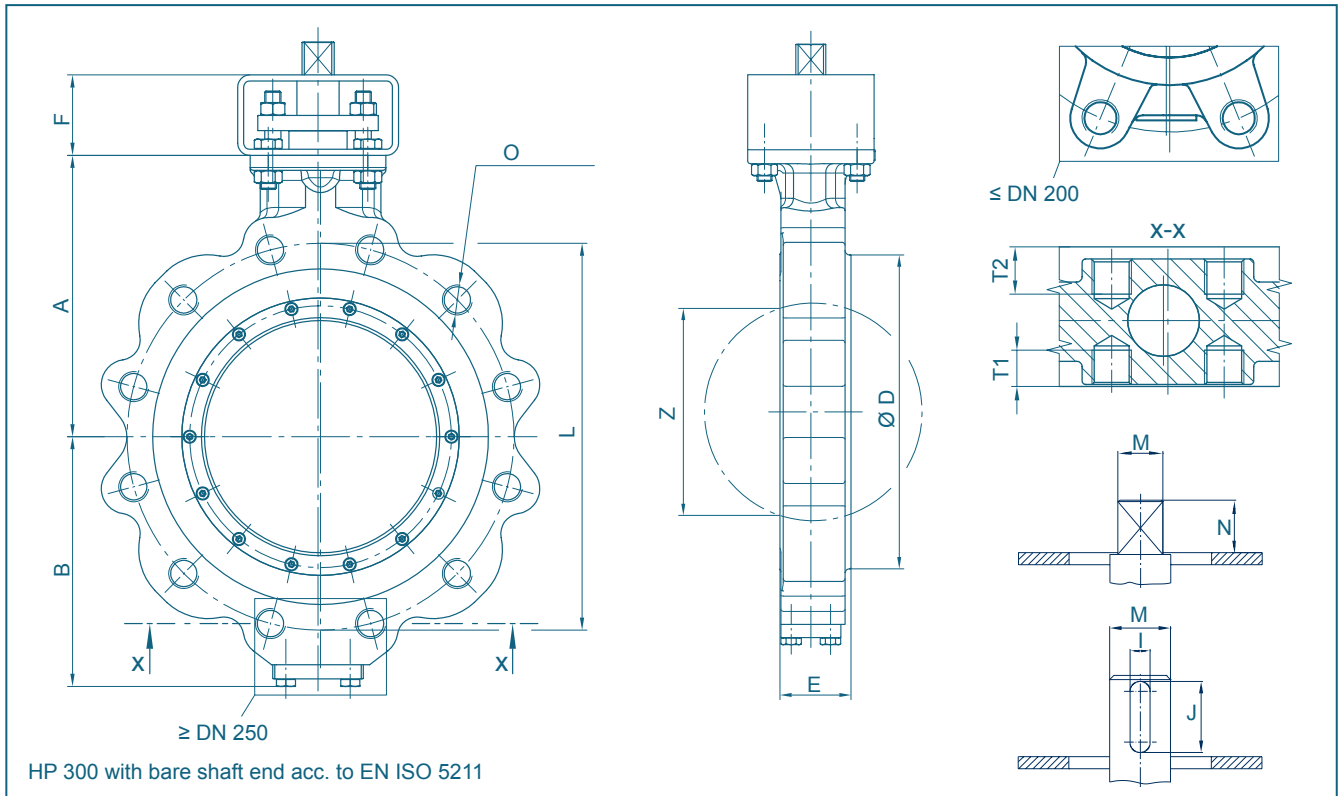

DN [mm]	Size [in]	Flange Connection	Dimensions [mm]															Weight [kg]	
			A	B	D	E	F	L	Square	I	J	M	N	Flange	O	T1	T2		Z
80	3	PN 40	120	95	138	49	80	160	V17	-	-	20	21	F07	8	-	-	68	11
		PN 63	120	95	138	49	80	170	V17	-	-	20	21	F07	8	-	-	68	
		class 300/600	120	95	138	49	80	168	V17	-	-	20	21	F07	8	-	-	68	
100	4	PN 40	154	126	160	56	80	190	V19/22	-	-	24	22	F10	8	-	-	78	14
		PN 63	154	126	160	56	80	200	V19/22	-	-	24	22	F10	8	-	-	78	
		class 300	154	126	160	54	80	200	V19/22	-	-	24	22	F10	8	-	-	81	
		class 600	154	126	160	54	80	216	V19/22	-	-	24	22	F10	8	-	-	81	
150	6	PN 40	199	162	216	70	80	250	V22	-	-	30	25	F12	8	-	-	119	33
		PN 63	199	162	216	70	80	280	V22	-	-	30	25	F12	8	-	-	119	
		class 300	199	162	216	60	80	270	V22	-	-	30	25	F12	12	-	-	127	
		class 600	199	162	216	60	80	292	V22	-	-	30	25	F12	12	-	-	127	
200	8	PN 40	231	198	280	72	80	320	V27	-	-	36	28	F12	12	-	-	185	46
		PN 63	231	198	280	72	80	345	V27	-	-	36	28	F12	12	-	-	185	
		class 300	231	198	280	73	80	330	V27	-	-	36	28	F12	12	-	-	182	
		class 600	231	198	280	73	80	349	V27	-	-	36	28	F12	12	-	-	182	
250	10	PN 40	280	249	335	76	100	385	V32/36	-	-	42	36	F14	12	-	-	226	90
		PN 63	280	249	335	76	100	400	V36/36	-	-	42	36	F14	12	-	-	226	
		class 300	280	249	335	83	100	387	V36/36	-	-	42	36	F14	16	24	25	222	
300	12	PN 40	295	293	410	114	100	450	V36	-	-	50	36	F16	16	32	43	268	110
		PN 63	295	293	410	114	100	460	V36	-	-	50	36	F16	16	30	50	268	
		class 300	295	293	410	92	100	451	V36	-	-	50	36	F16	16	29	28	285	
350	14	PN 40	331	340	460	127	100	510	V46	18	90	60	95	F16	16	31	41	301	175
		PN 63	331	340	460	127	100	525	V46	18	90	60	95	F16	16	33	43	301	
		class 300	331	340	460	118	100	514	V46	18	90	60	95	F16	20	23	24	308	
400	16	PN 40	363	372	512	140	200	585	V46	18	90	60	95	F25	16	43	43	265	
		class 300	363	372	512	133	200	572	V46	18	90	60	95	F25	20				
500	20	PN 40	442	434	610	152	200	670	-	22	125	80	130	F25	20			400	
		class 300	442	434	610	159	200	686	-	22	125	80	130	F25	24	30	30		
600	24	PN 40	500	492	725	178	200	795	-	25	125	90	130	F30	20	42	42	588	600
		class 300	500	492	725	181	200	813	-	25	125	90	130	F30	24			587	

HIGH PERFORMANCE BUTTERFLY VALVE HP 300

MATERIAL SPECIFICATION AND PARTS LIST

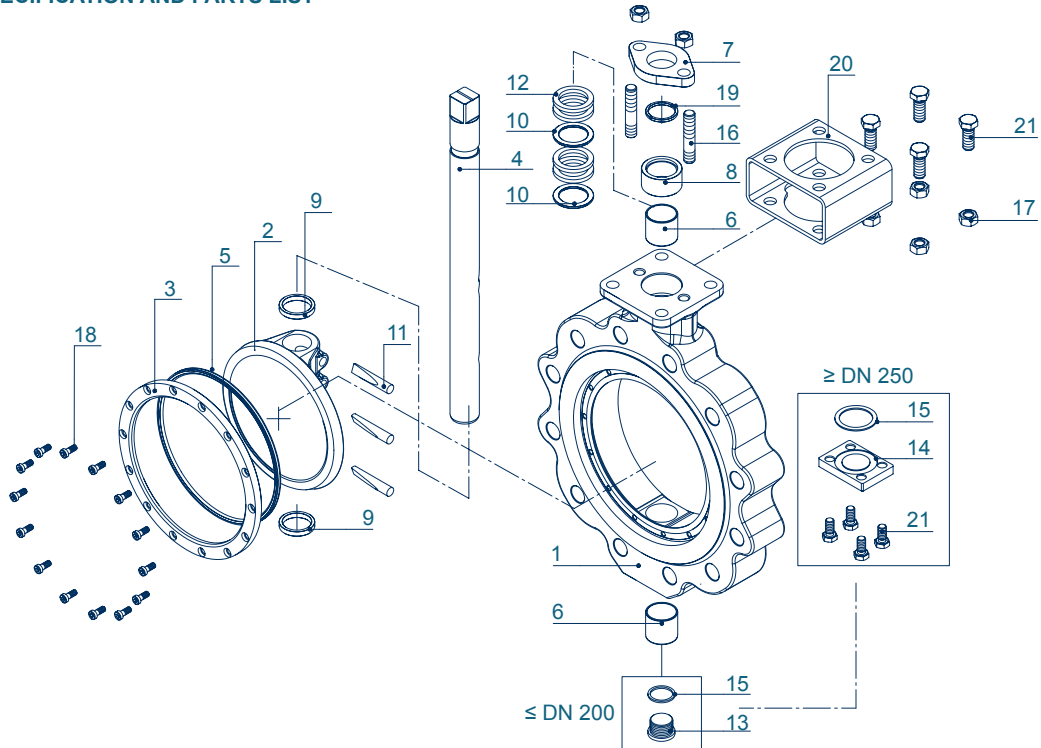

Pos.	Description	Material	Material No.	ASTM	Pos.	Description	Material	Material No.	ASTM		
1	Body	Carbon Steel	GP240GH	1.0619	A216 WCB	11	Taper pin	Stainless Steel	X4CrNiMo16-5	1.4418	
		Stainless Steel	G-X5CrNiMo19-11-2	1.4408	A351 CF8M			12	Shaft sealing	Graphite	Graphite
2	Disc	Stainless Steel	G-X5CrNiMo19-11-2	1.4408	A351 CF8M	13	Cap screw	Steel	A4-70		A193-B8
		Cast Iron	GP240GH (GS- C25 N)	1.0619	A216 WCB			14	Cover plate	Steel	H II
3	Clamping ring	Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti	15	Seal	Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti
		Stainless Steel	X39CrMo 17-1	1.4122	431			16	Stud bolt	Graphite - Stainless Steel	
4	Shaft	Stainless Steel	X5CrNiCuNb 16-4	1.4542	630	17	Hexagon nut			Steel	A2-70
		Stainless Steel	X6CrNiMoTi17-12-2	1.4571 nitriert	316 Ti			18	Socket head cap screw	Steel	A4-70
5	Seat ring	Stainless Steel	X5CrNiCuNb 16-4	1.4542	630	19	Blow-out prevention key			Stainless Steel	X8CrNiS18-9
		Graphite	Graphite	316	316			20	Bracket	=< DN 250	X5CrNi18-10
6	Bearing bush	Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti	21	Hexagon bolt			>DN 250	St galvanized
		Stainless Steel	X6CrNiMoTi17-12-2	1.4571 h.verchr.	316 Ti			21	Hexagon bolt	Steel	A2-70
8	Thrust collar	Stainless Steel	X8CrNiS18-9	1.4305	303	Other materials upon request.					
		Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti						
9	Bearing ring	Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti						
		Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti						
10	Support washer	Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti						
		Stainless Steel	X6CrNiMoTi17-12-2	1.4571	316 Ti						

Subject to change without notice

HIGH PERFORMANCE BUTTERFLY VALVE HP 300

TORQUE

- The values specified are based on the initial breakaway torque. (disc disengages from seat, torque then drops)


DN [mm]	Size [in]	Operating pressure			
		25 [bar]	40 [bar]	50 [bar]	63 [bar]
80	3	85	125	150	175
100	4	130	190	230	275
150	6	300	430	515	620
200	8	525	765	915	1100
250	10	820	1200	1430	1720
300	12	1180	1720	2060	2480
350	14	1610	2340	2800	3370
400	16	2100	3060	3660	4400
500	20	3300	4800	5700	-
600	24	4700	6900	8200	-

All values in Nm

PRESSURE/TEMPERATURE DIAGRAM

- Pressure control line for 1.0619 body material and metal seat
- Pressure control line for 1.4408 body material and metal seat

The diagram illustrates the performance of the standard version of our valve type HP. Valves for higher pressure or deviating temperature are available upon request.

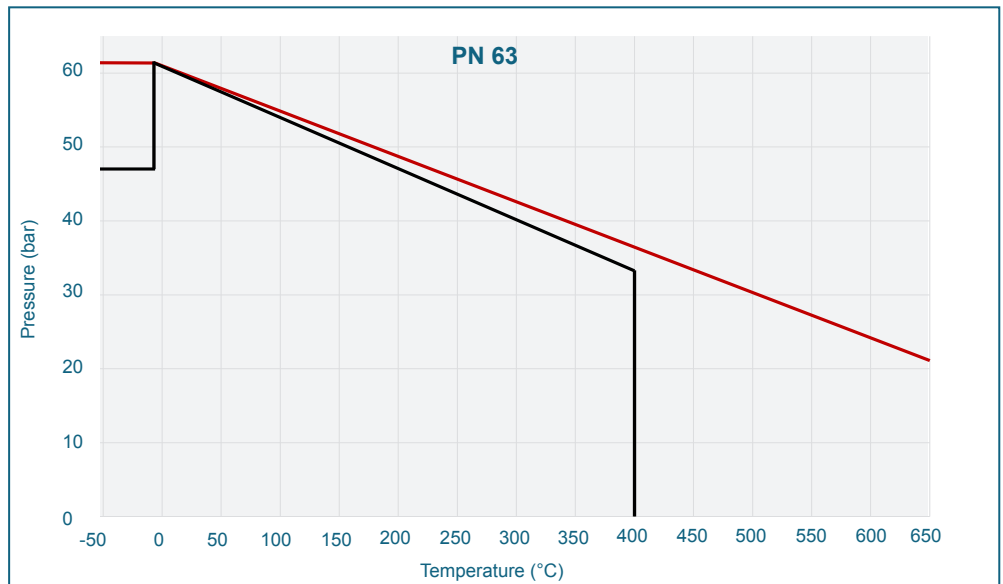

K_V-VALUES

- The K_V-value [m³ per hour] is the flow of water at a temperature of 5°C to 30°C (41°F to 86°F) at Δp of 1 bar

- The K_V-values specified are based on tests carried out by the Delfter Hydraulics Laboratories, the Netherlands

- Permissible velocity of flow
V_{max} 4,5 m/s for liquids,
V_{max} 70 m/s for gases

- The throttle function is linear at an angle 30° to 70°

- Avoid cavitation!

For further values, please contact our engineers.

DN [mm]	Size [in]	Opening angle α°						
		30°	40°	50°	60°	70°	80°	90°
80	3	8	28	66	110	144	166	173
100	4	13	46	110	183	241	277	288
150	6	34	117	279	466	613	704	734
200	8	36	132	324	560	909	1263	1403
250	10	38	147	368	819	1488	2067	2297
300	12	65	249	779	1693	2688	3278	3414
350	14	90	347	1085	2359	3744	4566	4756
400	16	120	461	1442	3135	4976	6068	6321
500	20	192	739	2310	5021	7970	9719	10124
600	24	281	1082	3382	7352	11669	14231	14824

Subject to change without notice